



S922

Time & Attendance
Portable Device



Features

Standard Features

- IP65 Rated
- Shock-resistant up to 1m from ground
- 3.5-inch colour TFT screen
- Less than 1 second user recognition
- Stores 5,000 templates and 200,000 transactions
- Built-in USB port allows for manual data transfer
- Reads Fingerprint and/or Pin's and/or RFID card

Enhanced Features

- Audio - Visual indications for valid / invalid entries
- Wi-Fi or GPRS communication
- Backup battery
- Integrated 125kHz RFID proximity reader

Software

- ZK Time 5.0 Attendance Management (Basic Free)
- ZKTime.net (Advanced Licenced)

Related Products



ZK4500



RFID Cards & Tags

Alternative Products



PT100



iClock990



S900




IN01-A


Specifications

- Fingerprint Capacity: 5,000 templates
- Transaction Capacity: 200,000 transactions
- RFID Card Capacity: 30,000 cards
- Sensor: ZK Optical Sensor
- Algorithm Version: ZK Finger v10.0
- Built-in Card Reader: 125kHz RFID proximity reader
- Communication: TCP/IP, USB-host
- Work Codes: Yes
- Standard Functions: Battery backup (7600 mAh)
- Optional Functions: Wi-Fi or GPRS communication
- Power Supply: 12V DC 3A
- Operating Temperature: 0 °C - 45 °C
- Operating Humidity: 10% - 90%
- Dimension: 230 X 231 X 83mm

Dimensions

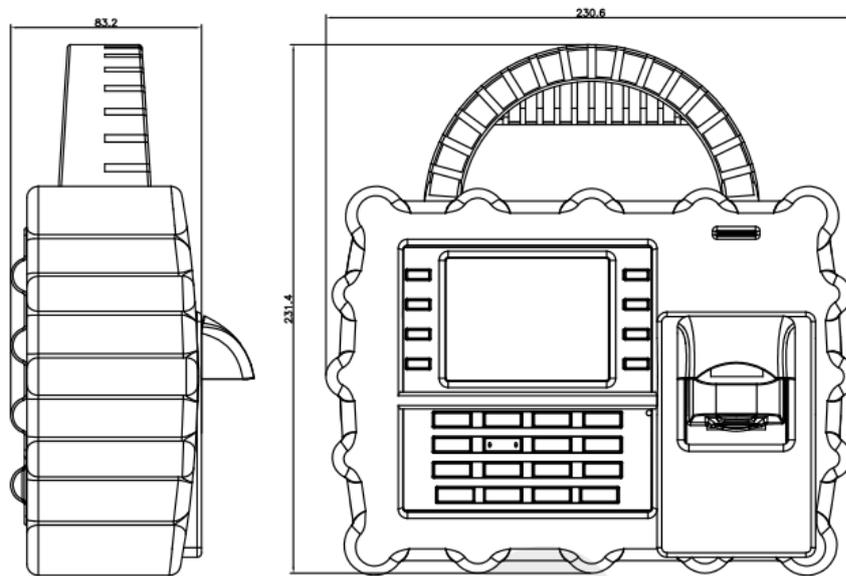

Configuration

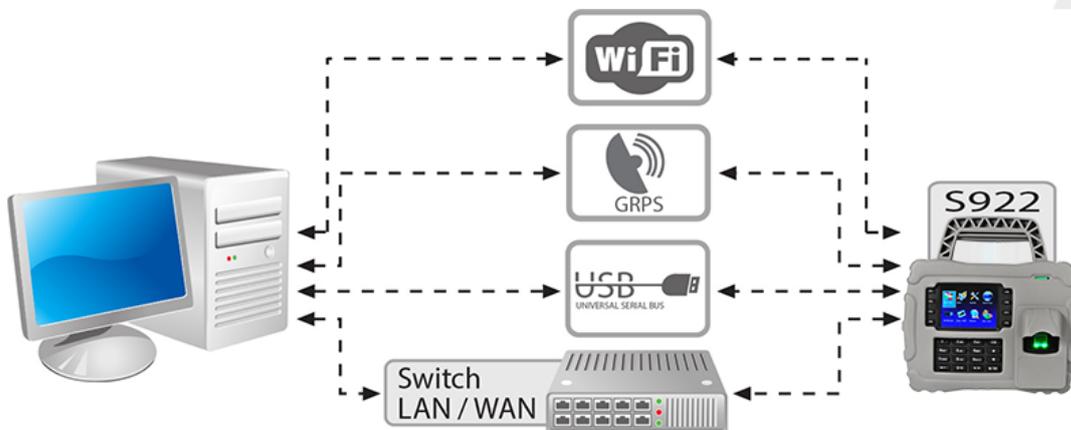

ZKTeco, ZKSoftware, ZKAccess, ZKIVision, ZKBioblock, ZKAFIS are either registered trademarks or trademarks of ZKTECO INC and ZKTeco South Africa.

You must obtain written and signed permission from ZKTECO before using any photograph owned or licenced by ZKTECO.

Copyright © 1998-2014 ZKTECO INC. All rights reserved.